


AC-IW

Cable clamp with additional insulating vat for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel and additional insulating vat made of polystyrene. For fastening to C-profile rails (C+, C60°) with a slot size of 18/22 mm.

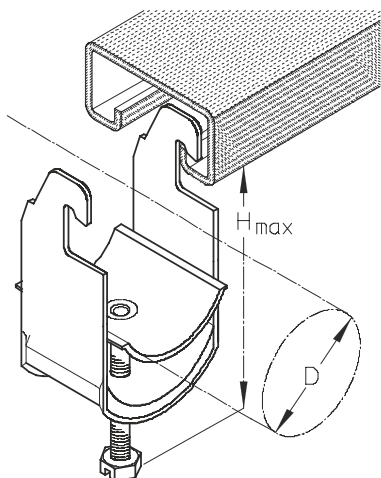

Zinc coated

Product	D	H _{max}	M	Number of cables	G
12 AC-IW	8-12 mm	42,50 mm	2 Nm	1	2,80 kg/100
16 AC-IW	12-16 mm	47,50 mm	2 Nm	1	3,20 kg/100
20 AC-IW	16-20 mm	51,50 mm	2 Nm	1	3,60 kg/100
24 AC-IW	20-24 mm	55,70 mm	2 Nm	1	4,20 kg/100
28 AC-IW	24-28 mm	59,70 mm	2 Nm	1	4,50 kg/100
32 AC-IW	28-32 mm	65,00 mm	2 Nm	1	7,10 kg/100
36 AC-IW	32-36 mm	69,00 mm	2 Nm	1	7,50 kg/100
40 AC-IW	36-40 mm	73,00 mm	2 Nm	1	8,20 kg/100
44 AC-IW	40-44 mm	83,00 mm	4 Nm	1	10,20 kg/100
48 AC-IW	44-48 mm	87,00 mm	4 Nm	1	10,60 kg/100
52 AC-IW	48-52 mm	92,50 mm	4 Nm	1	11,60 kg/100
56 AC-IW	52-56 mm	96,50 mm	4 Nm	1	12,20 kg/100
60 AC-IW	56-60 mm	100,5 mm	4 Nm	1	15,90 kg/100
64 AC-IW	60-64 mm	104,50 mm	4 Nm	1	17,50 kg/100
70 AC-IW	64-70 mm	111,50 mm	4 Nm	1	18,60 kg/100

D : Diameter

H_{max} : Maximum height


M : Torque

Number of cables : Maximum number of installable cables

G : Weight



DETAILS / APPLICATIONS

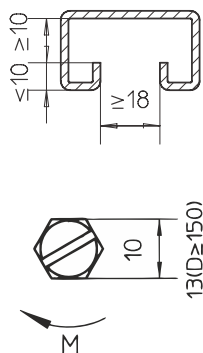

OPTIONAL ACCESSORIES

A 41, A 2, A 4, A 9, A 8, A 7, G 100, G50, U-03, U-13, UL-03, UL-13, KHA 21, KHA 41



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

