


VB

Connection plate

Connection plate for cable trays.

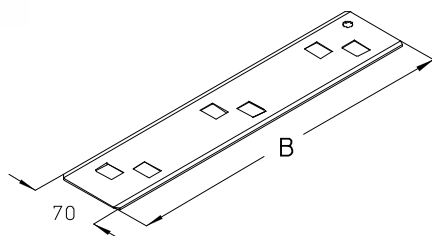

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
VB 10S	54 mm	70 mm	0,04 kg
VB 15S	105 mm	70 mm	0,08 kg
VB 20S	155 mm	70 mm	0,11 kg
VB 30S	255 mm	70 mm	0,18 kg
VB 40S	355 mm	70 mm	0,27 kg
VB 50S	455 mm	70 mm	0,32 kg
VB 60S	555 mm	70 mm	0,38 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
VB 10F	54 mm	70 mm	0,04 kg
VB 15F	105 mm	70 mm	0,08 kg
VB 20F	155 mm	70 mm	0,11 kg
VB 30F	255 mm	70 mm	0,19 kg
VB 40F	355 mm	70 mm	0,28 kg
VB 50F	455 mm	70 mm	0,34 kg
VB 60F	555 mm	70 mm	0,40 kg





Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	L	G
VB 10E	54 mm	70 mm	0,04 kg
VB 15E	105 mm	70 mm	0,08 kg
VB 20E	155 mm	70 mm	0,11 kg
VB 30E	255 mm	70 mm	0,18 kg
VB 40E	355 mm	70 mm	0,27 kg
VB 50E	455 mm	70 mm	0,32 kg
VB 60E	555 mm	70 mm	0,38 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	L	G
VB 10E4	54 mm	70 mm	0,04 kg
VB 15E4	105 mm	70 mm	0,08 kg
VB 20E4	155 mm	70 mm	0,11 kg
VB 30E4	255 mm	70 mm	0,18 kg
VB 40E4	355 mm	70 mm	0,27 kg
VB 50E4	455 mm	70 mm	0,32 kg
VB 60E4	555 mm	70 mm	0,38 kg

Coating Magnelis®, EN 10346

Product	B	L	G
VB 10ZM	54 mm	70 mm	0,04 kg
VB 15ZM	105 mm	70 mm	0,08 kg
VB 20ZM	155 mm	70 mm	0,11 kg
VB 30ZM	255 mm	70 mm	0,18 kg
VB 40ZM	355 mm	70 mm	0,27 kg
VB 50ZM	455 mm	70 mm	0,32 kg
VB 60ZM	555 mm	70 mm	0,38 kg





B : Width
L : Length
G : Weight

