


LD

Pokrywa drabinki kablowej

Pokrywa drabinki kablowej.

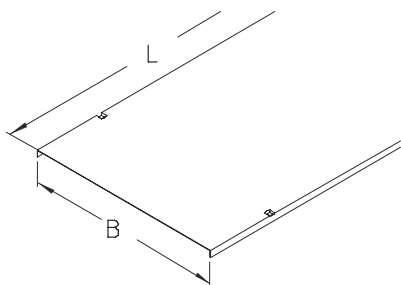

O cynk metodą Sendzimira, zgodnie z DIN EN 10346

Produkt	B	L	G
LD 10S	106 mm	3000 mm	3,12 kg
LD 20S	206 mm	3000 mm	5,52 kg
LD 30S	306 mm	3000 mm	7,92 kg
LD 40S	406 mm	3000 mm	10,32 kg
LD 50S	506 mm	3000 mm	12,72 kg
LD 60S	606 mm	3000 mm	15,12 kg

O cynk zanurzeniowo-ogniowy, zgodnie z BS 729 (DIN EN ISO 1461)

Produkt	B	L	G
LD 10F	106 mm	3000 mm	3,49 kg
LD 20F	206 mm	3000 mm	6,18 kg
LD 30F	306 mm	3000 mm	8,87 kg
LD 40F	406 mm	3000 mm	11,56 kg
LD 50F	506 mm	3000 mm	14,25 kg
LD 60F	606 mm	3000 mm	16,93 kg



Stal nierdzewna, zgodnie z ASTM 304 / BS 304 S 3

Produkt	B	L	G
LD 10E	106 mm	3000 mm	3,12 kg
LD 20E	206 mm	3000 mm	5,52 kg
LD 30E	306 mm	3000 mm	7,92 kg
LD 40E	406 mm	3000 mm	10,32 kg
LD 50E	506 mm	3000 mm	12,72 kg
LD 60E	606 mm	3000 mm	15,12 kg

Stal kwasoodporna, zgodnie z ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Produkt	B	L	G
LD 10E4	106 mm	3000 mm	3,12 kg
LD 20E4	206 mm	3000 mm	5,52 kg
LD 30E4	306 mm	3000 mm	7,92 kg
LD 40E4	406 mm	3000 mm	10,32 kg
LD 50E4	506 mm	3000 mm	12,72 kg
LD 60E4	606 mm	3000 mm	15,12 kg

Powłoka Magnelis®, zgodnie z DIN EN 10346

Produkt	B	L	G
LD 10ZM	106 mm	3000 mm	3,12 kg
LD 20ZM	206 mm	3000 mm	5,52 kg
LD 30ZM	306 mm	3000 mm	7,92 kg
LD 40ZM	406 mm	3000 mm	10,32 kg
LD 50ZM	506 mm	3000 mm	12,72 kg
LD 60ZM	606 mm	3000 mm	15,12 kg

B : Szerokość**L** : Długość**G** : Waga

DETALE / ZASTOSOWANIE

