


LD

Cable ladder cover

Cable ladder cover.

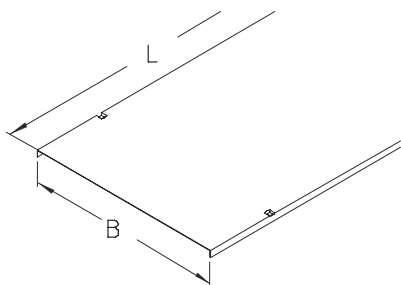

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
LD 10S	106 mm	3000 mm	3,12 kg
LD 20S	206 mm	3000 mm	5,52 kg
LD 30S	306 mm	3000 mm	7,92 kg
LD 40S	406 mm	3000 mm	10,32 kg
LD 50S	506 mm	3000 mm	12,72 kg
LD 60S	606 mm	3000 mm	15,12 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
LD 10F	106 mm	3000 mm	3,49 kg
LD 20F	206 mm	3000 mm	6,18 kg
LD 30F	306 mm	3000 mm	8,87 kg
LD 40F	406 mm	3000 mm	11,56 kg
LD 50F	506 mm	3000 mm	14,25 kg
LD 60F	606 mm	3000 mm	16,93 kg



Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	L	G
LD 10E	106 mm	3000 mm	3,12 kg
LD 20E	206 mm	3000 mm	5,52 kg
LD 30E	306 mm	3000 mm	7,92 kg
LD 40E	406 mm	3000 mm	10,32 kg
LD 50E	506 mm	3000 mm	12,72 kg
LD 60E	606 mm	3000 mm	15,12 kg

Stainless steel, material no. 1.4571 (ANSI 316 Ti) / 1.4404 (ANSI 316 L)

Product	B	L	G
LD 10E4	106 mm	3000 mm	3,12 kg
LD 20E4	206 mm	3000 mm	5,52 kg
LD 30E4	306 mm	3000 mm	7,92 kg
LD 40E4	406 mm	3000 mm	10,32 kg
LD 50E4	506 mm	3000 mm	12,72 kg
LD 60E4	606 mm	3000 mm	15,12 kg

Coating Magnelis® according to DIN EN 10346

Product	B	L	G
LD 10ZM	106 mm	3000 mm	3,12 kg
LD 20ZM	206 mm	3000 mm	5,52 kg
LD 30ZM	306 mm	3000 mm	7,92 kg
LD 40ZM	406 mm	3000 mm	10,32 kg
LD 50ZM	506 mm	3000 mm	12,72 kg
LD 60ZM	606 mm	3000 mm	15,12 kg

B : Width
L : Length
G : Weight





DETAILS / APPLICATIONS

