


SKL M

Beam clamp set, KDU 50/ KDU 57/ KDU 60

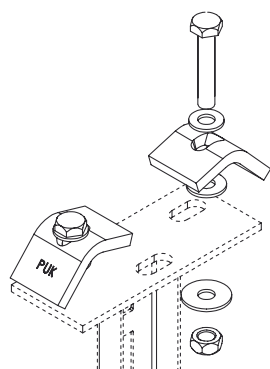

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	k	P _{max}	M	G
SKL MF	5 - 25 mm	10 kN	35 Nm	0,45 kg/set
Accessories included:				
2x SES 10X55F 2x US 10X21F 2x US 10X30F 2x SEM 10F 2x UVS M10X24		Hexagon head bolt, DIN 933 Square washer, DIN 125 Square washer, DIN 9021 Hexagon-nut, DIN 934 Captive washer		


Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	k	P _{max}	M	G
SKL ME4	5 - 25 mm	10 kN	35 Nm	0,46 kg/set
Accessories included:				
2x SES 10X55E4 2x SEM 10E4 2x US 10X30E4 2x US 10X21E4 2x UVS M10X24		Hexagon head bolt, DIN 933 Hexagon-nut, DIN 934 Square washer, DIN 9021 Square washer, DIN 125 Captive washer		

k : Clamping range
P_{max} : Maximum permissible load
M : Moment
G : Weight



DETAILS / APPLICATIONS

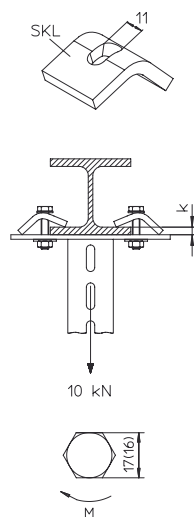

OPTIONAL ACCESSORIES

KDU 40, KDU 57, KDU 60, KHA 2, HS22



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

