


KHA 2

C-rail, perforated, 50x31 mm



Profile rail 50x31x3,25 mm, with continuous perforation 13x26 mm. Slot size 22 mm.

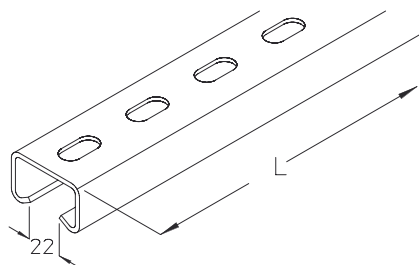

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 2-05F	31 mm	50 mm	500 mm	3,25 mm	1,50 kg
KHA 2-10F	31 mm	50 mm	1000 mm	3,25 mm	3,00 kg
KHA 2-15F	31 mm	50 mm	1500 mm	3,25 mm	4,50 kg
KHA 2-20F	31 mm	50 mm	2000 mm	3,25 mm	6,00 kg
KHA 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9,00 kg
KHA 2-60F	31 mm	50 mm	6000 mm	3,25 mm	17,90 kg

H : Height

B : Width


L : Length

t : Material thickness

G : Weight

DETAILS / APPLICATIONS



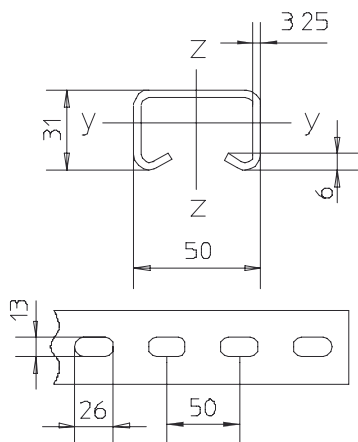

OPTIONAL ACCESSORIES

HS22, SKS H



System E30 - E90. CNBOP-PIB nr CNBOP-PIB-KOT-2017/0013-3703

