


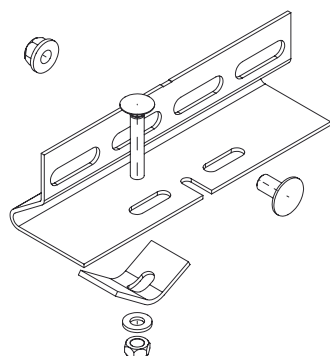

WPHS-P

Flange mounting clamp (profiles)

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	G
WPHS-P S	0,54 kg
Incl.:	
1x FRSV 10X20	Round-head screw with short square, DIN 603
1x SEMS 10	Hexagon nut, self-locking, DIN 6923
1x FRS 8X50	Round-head screw with short square, DIN 603
1x US 8X17	Square washer, DIN 125
1x SKLL F	Clamping claw
1x SEM 8	Hexagon-nut, DIN 934

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	G
WPHS-P F	0,58 kg
Incl.:	
1x KLS 10X20F	Fixing set
1x FRS 8X50E	Round-head screw with short square, DIN 603
1x US 8X17E	Square washer, DIN 125
1x SKLL F	Clamping claw
1x SEM 8E	Hexagon-nut, DIN 934

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	G
WPHS-P E	0,54 kg





Product	G
Incl.: 1x FRSV 10X20E 1x SEMS 10E 1x FRS 8X50E 1x US 8X17E 1x SKLL E 1x SEM 8E	Round-head screw with short square, DIN 603 Hexagon nut, self-locking, DIN 6923 Round-head screw with short square, DIN 603 Square washer, DIN 125 Clamping claw Hexagon-nut, DIN 934

G : Weight

