


LK 100

Cable ladder cross-piece, height=100 mm

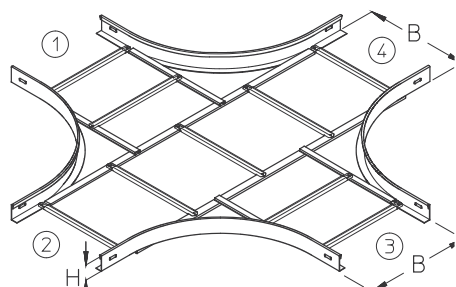

Cable ladder crossing for horizontal change of direction.
Riveted rungs. Fittings are also available in an angular shape.
① , ② , ③ , ④ , can have other dimensions.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Continuously hot galvanized (Senzimir process) (DIN EN 10346)

Product	H	B	R	G
LK 100-10S	100 mm	100 mm	400 mm	6,80 kg
LK 100-20S	100 mm	200 mm	400 mm	7,41 kg
LK 100-30S	100 mm	300 mm	400 mm	7,98 kg
LK 100-40S	100 mm	400 mm	400 mm	8,56 kg
LK 100-50S	100 mm	500 mm	400 mm	9,34 kg
LK 100-60S	100 mm	600 mm	400 mm	9,96 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	H	B	R	G
LK 100-10F	100 mm	100 mm	400 mm	7,48 kg
LK 100-20F	100 mm	200 mm	400 mm	8,15 kg
LK 100-30F	100 mm	300 mm	400 mm	8,78 kg
LK 100-40F	100 mm	400 mm	400 mm	9,42 kg
LK 100-50F	100 mm	500 mm	400 mm	10,28 kg
LK 100-60F	100 mm	600 mm	400 mm	10,96 kg




Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	B	R	G
LK 100-10E	100 mm	100 mm	400 mm	6,80 kg
LK 100-20E	100 mm	200 mm	400 mm	7,41 kg
LK 100-30E	100 mm	300 mm	400 mm	7,98 kg
LK 100-40E	100 mm	400 mm	400 mm	8,56 kg
LK 100-50E	100 mm	500 mm	400 mm	9,34 kg
LK 100-60E	100 mm	600 mm	400 mm	9,96 kg

H : Height
B : Width
R : Radius
G : Weight

DETAILS / APPLICATIONS

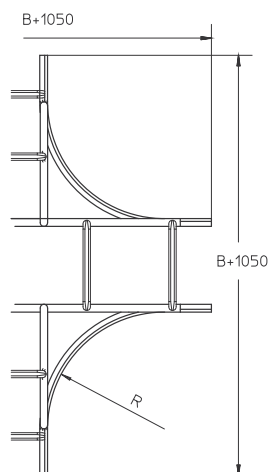

OPTIONAL ACCESSORIES

LGV 100, LGVH 100, LGVV 100, KLU

