


RBDR

Cable tray bend cover with turning bolts

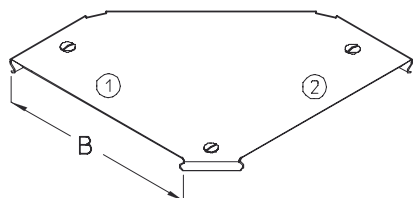

Cable tray bend cover, positive locking, with additional turning bolts.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	G
RBDR 05S	50 mm	0,13 kg
RBDR 10S	100 mm	0,22 kg
RBDR 20S	200 mm	0,49 kg
RBDR 30S	300 mm	0,90 kg
RBDR 40S	400 mm	1,43 kg
RBDR 50S	500 mm	2,10 kg
RBDR 60S	600 mm	3,06 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	G
RBDR 05F	50 mm	0,14 kg
RBDR 10F	100 mm	0,24 kg
RBDR 20F	200 mm	0,54 kg
RBDR 30F	300 mm	1,00 kg
RBDR 40F	400 mm	1,59 kg
RBDR 50F	500 mm	2,34 kg
RBDR 60F	600 mm	3,42 kg



Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	G
RBDR 05E	50 mm	0,13 kg
RBDR 10E	100 mm	0,22 kg
RBDR 20E	200 mm	0,49 kg
RBDR 30E	300 mm	0,90 kg
RBDR 40E	400 mm	1,43 kg
RBDR 50E	500 mm	2,10 kg
RBDR 60E	600 mm	3,06 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	G
RBDR 05E4	50 mm	0,13 kg
RBDR 10E4	100 mm	0,22 kg
RBDR 20E4	200 mm	0,49 kg
RBDR 30E4	300 mm	0,90 kg
RBDR 40E4	400 mm	1,43 kg
RBDR 50E4	500 mm	2,10 kg
RBDR 60E4	600 mm	3,06 kg

Coating Magnelis®, EN 10346

Product	B	G
RBDR 05ZM	50 mm	0,13 kg
RBDR 10ZM	100 mm	0,22 kg
RBDR 20ZM	200 mm	0,49 kg
RBDR 30ZM	300 mm	0,90 kg
RBDR 40ZM	400 mm	1,43 kg
RBDR 50ZM	500 mm	2,10 kg
RBDR 60ZM	600 mm	3,06 kg

B : Width

G : Weight

Page 2



DETAILS / APPLICATIONS

