


LDR

Cable ladder cover with turning bolt

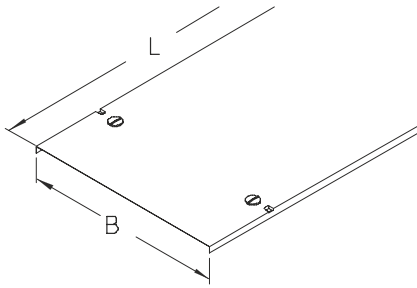

Cable ladder cover with turning bolt. Installation of covers in outdoor areas requires additional provisions against storm forces. Turning bolts are in no case sufficient as security provision.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	G
LDR 10S	106 mm	3000 mm	3,23 kg
LDR 20S	206 mm	3000 mm	5,63 kg
LDR 30S	306 mm	3000 mm	8,03 kg
LDR 40S	406 mm	3000 mm	10,43 kg
LDR 50S	506 mm	3000 mm	12,83 kg
LDR 60S	606 mm	3000 mm	15,23 kg

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	L	G
LDR 10F	106 mm	3000 mm	3,61 kg
LDR 20F	206 mm	3000 mm	6,30 kg
LDR 30F	306 mm	3000 mm	8,98 kg
LDR 40F	406 mm	3000 mm	11,67 kg
LDR 50F	506 mm	3000 mm	14,36 kg
LDR 60F	606 mm	3000 mm	17,05 kg





Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	L	G
LDR 10E	106 mm	3000 mm	3,23 kg
LDR 20E	206 mm	3000 mm	5,63 kg
LDR 30E	306 mm	3000 mm	8,03 kg
LDR 40E	406 mm	3000 mm	10,43 kg
LDR 50E	506 mm	3000 mm	12,83 kg
LDR 60E	606 mm	3000 mm	15,23 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	L	G
LDR 10E4	106 mm	3000 mm	3,23 kg
LDR 20E4	206 mm	3000 mm	5,63 kg
LDR 30E4	306 mm	3000 mm	8,03 kg
LDR 40E4	406 mm	3000 mm	10,43 kg
LDR 50E4	506 mm	3000 mm	12,83 kg
LDR 60E4	606 mm	3000 mm	15,23 kg

Coating Magnelis[®] according to DIN EN 10346

Product	B	L	G
LDR 10ZM	106 mm	3000 mm	3,23 kg
LDR 20ZM	206 mm	3000 mm	5,63 kg
LDR 30ZM	306 mm	3000 mm	8,03 kg
LDR 40ZM	406 mm	3000 mm	10,43 kg
LDR 50ZM	506 mm	3000 mm	12,83 kg
LDR 60ZM	606 mm	3000 mm	15,23 kg

B : Width
L : Length
G : Weight



DETAILS / APPLICATIONS

